


SERIE - "MK"

PARA MEDIOS Y GRANDES CAUDALES, LIQUIDOS O GASES

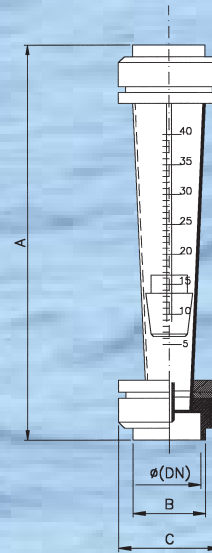

TIPO	AGUA L/H	AIRE Nmc/h	CONEXION ROSCA DN	A	B
MKF	300	6	1/2"	430	80
	400	8	3/4"		
	600	10	1"		
	800				
MKE	1.200	20	3/4"	430	80
	1.500		1"		
MKD/4	2.000	40	3/4"	430	100
	2.500		1"		
	3.500				
MKD/5	4.000	60	1"	430	100
	5.000		1"1/4		
	6.000		1"1/2		
MKC	5.000	80	1"1/2	540	100
	6.000		2"		
	8.000				
MKB	10.000	130	1"1/2	540	120
	12.500		2"		
	15.000				
MKA	20.000	160	2"	540	140
	25.000				
	30.000	250	2"1/2		
	37.000		3"		
	45.000				

Construcción standard:

Cuerpo PVC antiácido.
Tubo troncocónico en policarbonato atóxico e irrompible.

Presión máxima de prueba 10 bar.
Precisión: +/-5%

Aplicaciones especiales:

Provisto de contactos de máximo y mínimo.
Cuerpo en PP, temperatura máxima 100° C

Instalación:

Mediante bridas o conexiones roscadas.

