E2 DATA SHEET

SPECIFICATIONS & PERFORMANCE

2” Elima-Matic
Bolted Aluminum – ATEX
with Metal Center Section

PERFORMANCE

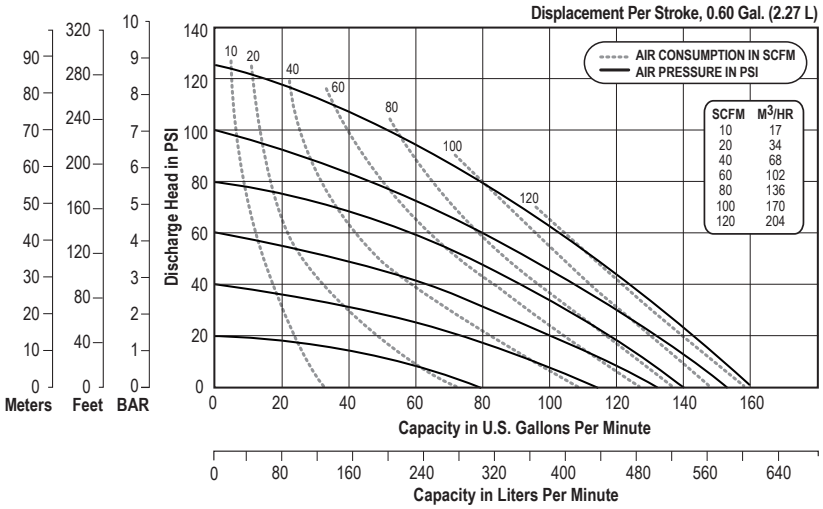

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate
Adjustable to . .0-163 gpm (617 lpm)
Port Size
Suction . . . . . .2” NPT
Discharge . . . . . .2” NPT
Air Inlet . . . . . 1/2” NPT
Air Exhaust . . . . . .1” NPT
Suction Lift
Dry . . . . . .18’ (5.5 m)
Wet . . . . . .32’ (9.8 m)
Max Solid Size (Diameter)
. . . . . .7/16” (11.1 mm)
Max Noise Level . . . . . 92 dB(A)
Shipping Weights
Aluminum . . . . . 81 lbs (36.7 kg)

DIMENSIONS

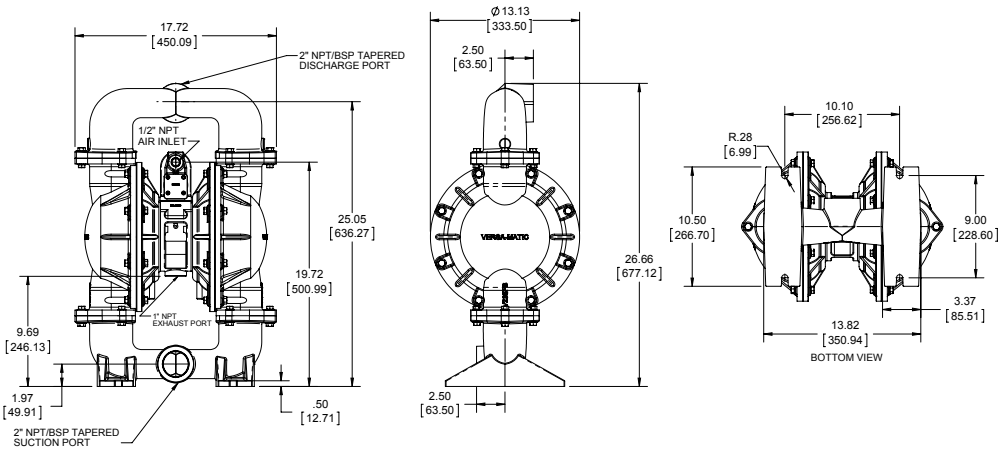

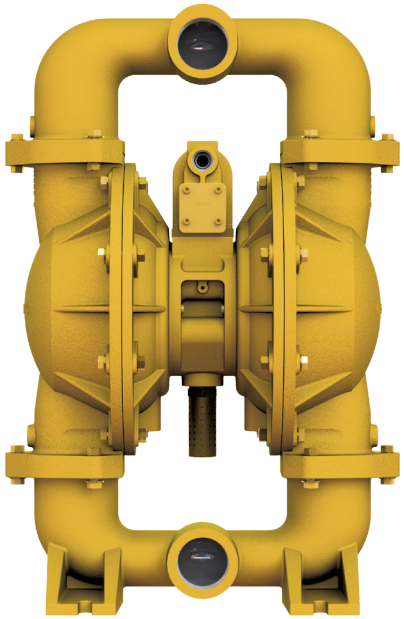

VERSAMATIC®
VERSAMATIC.COM

Warren Rupp, Inc. | A Unit of IDEX Corporation
©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.
e2mdlCdsATEXAB-rev0519

RONA
Agitación
Dosificación
Bombeo
ronadosificacion.es